


The New Extrusion Melt Blender SMB-GXS*

Cast in one Piece...

Static Mixer with Integrated longitudinal reinforcement bars

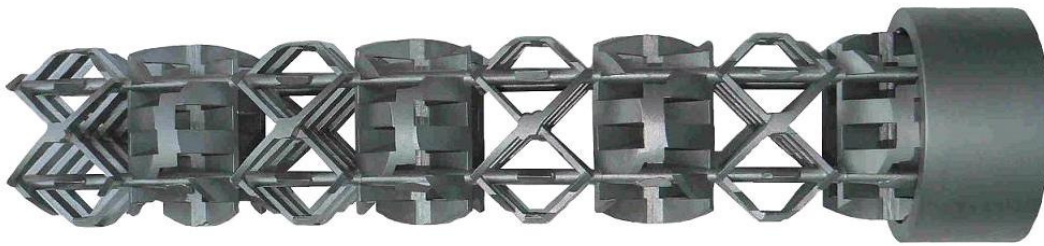

The New STAMIXCO Extrusion Melt Blender SMB-GXS consists of four (4) to eight (8) very efficient static mixing elements with integrated longitudinal bars. This design offers an improved strength with an open structure (no ring). The SMB-GXS mixing elements are extremely resistant due to their monolithic construction where the mixing elements are obtained via a single molten metal pour. They are made of heat treated high strength 17-4 PH stainless steel.



Static Mixer SMB-GXS – DN40
Mixing efficiency through SMB-GXS with white and blue epoxy resins

Available in sizes DN25mm – DN125mm

Characteristics

- Static Mixer cast in one piece
→ monolythic structure
- **No Welding**
- Open X-Structure – easy to clean and check
- Very high strength obtained via the integrated longitudinal bars
- Easy retrofit
- High mixing efficiency (same as SMB-R)
- Short length
- Stainless steel 1.4542 (= 17-4 PH, A630, heat treated)
- SMB-GXS mixer easy removable from the bore
- No sleeve in bore construction requiring machining its inside diameter with tight tolerances; necessary bore tolerances for SMB-GXS is +0.1/+0.2mm only

→ For detailed information about our static mixer SMB for Extrusion, please refer to our E-SMB-R_03.2010 Brochure

* The Static Melt Blender SMB-GXS is not offered for sale in the USA.

DIMENSIONS OF SMB-GXS


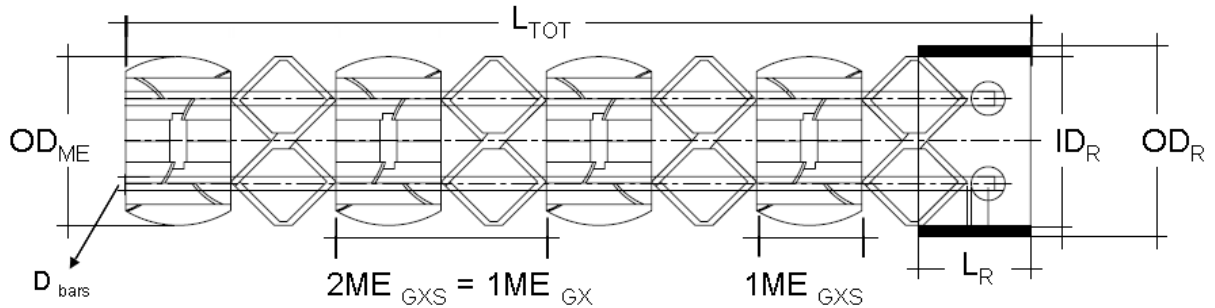


Figure #1: Main dimension of Melt Blender SMB-GXS. For values see table below.

Extruder Screw Diameter [mm]		Melt Blender	Ring		Mixing Elements		Bore			Length
High Viscosity Polymer	Low Viscosity Polymer	Type SMB-GXS	DN [mm]	OD _R x ID _R x L _R [mm]	OD _{ME} [mm]	D _{bars} [mm]	ID _B [mm]	ID _{BR} [mm]	L _{BR} [mm]	L _{tot.} [mm]
25	45	25/32 - 8	25	32.0 x 26 x 20.0	24.7	2.1	26.0	32.0	20.0	138
50	60	40/48 - 8	40	48.0 x 41.5 x 30.0	40.6	3.3	41.5	48.0	30.0	211
60	75	50/60 - 8	50	60.0 x 52.0 x 35.0	50.7	4.2	52.0	60.0	35.0	268
75	100	65/75 - 8	65	75.0 x 68.0 x 42.0	66.5	5.5	68.0	75.0	42.0	351
90	120	80/90 - 8	80	90.0 x 82.0 x 53.0	80.0	6.7	82.0	90.0	53.0	435
120	150	100/115 - 8	100	115.0 x 103.5 x 63.0	101.2	8.5	103.5	115.0	63.0	528
150	200	125/140 - 8	125	140.0 x 129.5 x 68.0	126.2	10.5	129.5	140.0	68.0	684

Tolerances: OD_R: +0/-0.20; ID_R: +0/-0.2; L_R: -0.1/-0.2; L_{BR}: +0/-0.2; OD_{ME}: +0/-0.2; ID_B: +0/-0.2; ID_{BR}: +0.1/+0.2; L_{tot.}: +5/-5

INSTALLATION

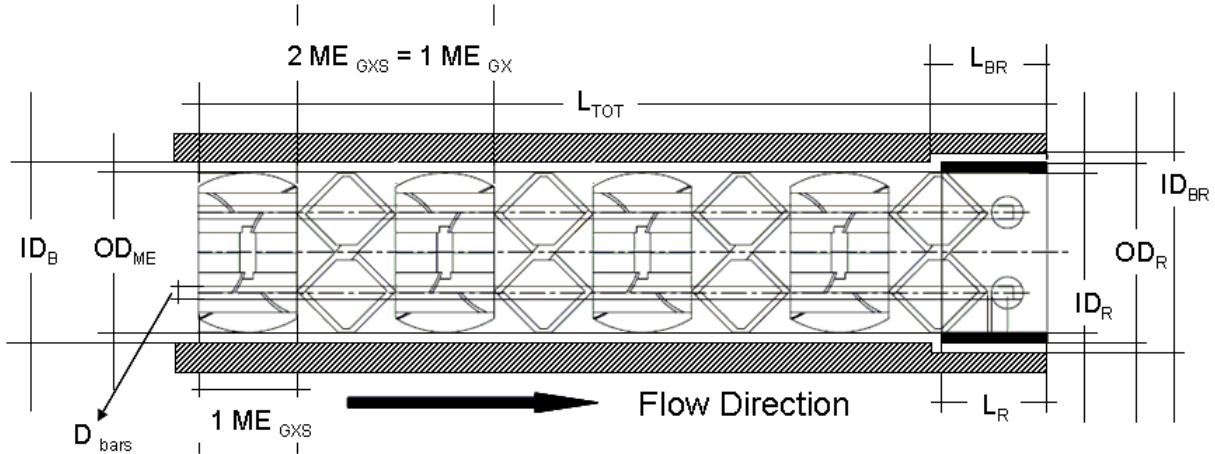

stamixco
www.stamixco.com

A young company with over 60 years of employee accumulated experience in static mixing technology.

Europe, Asia-Pacific, Africa
Stamixco Ltd.
Kronaustasse 10
CH-8404 Winterthur, Switzerland
Tel: +41 52 338 17 11
Fax: +41 52 338 17 33
E-mail: info@stamixco.com

North and South America
StaMixCo LLC
235 - 84th Street
Brooklyn, NY 11209, USA
Tel: +1 (718) 748 4600
Fax: +1 (718) 833 8827
E-mail: stamixco@msn.com

Distributed by:

NOTE: We believe the information contained in this brochure is correct. However, the information is not to be construed as implying any warranty or guarantee of performance. We reserve the right to modify the design and construction of our products anytime based on new findings and developments.

E-SMB-GXS_10.2010